
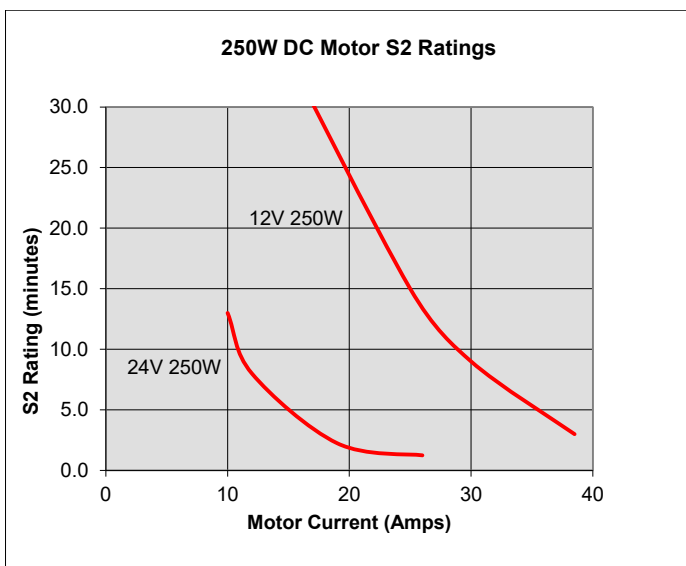
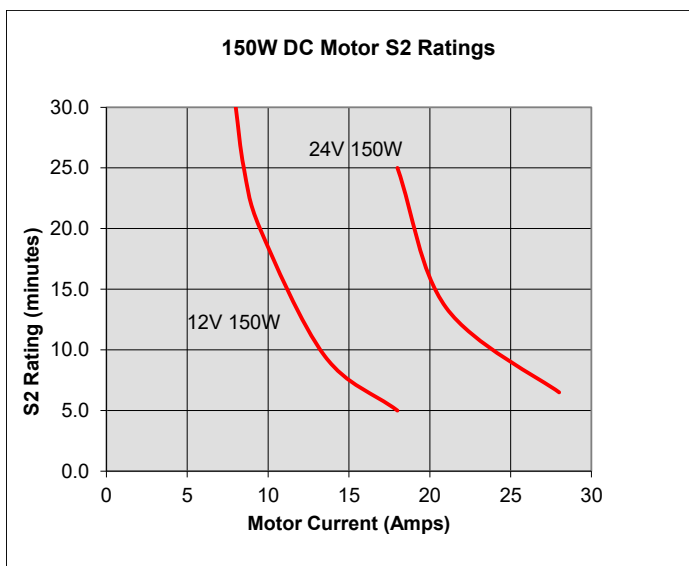
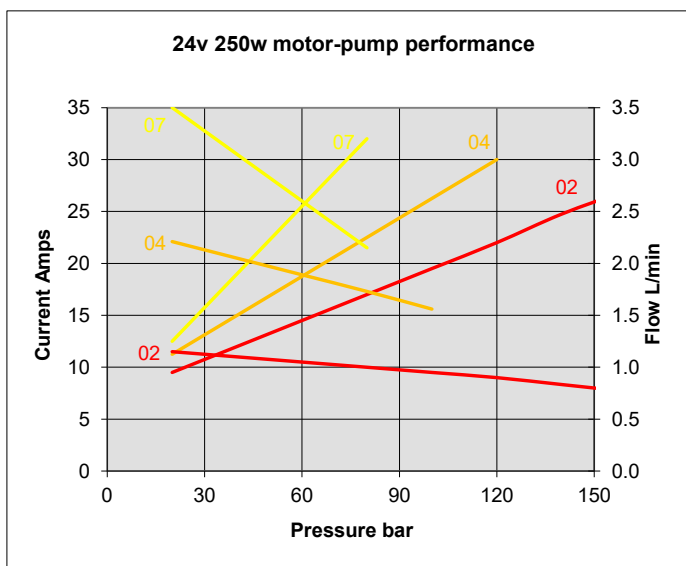
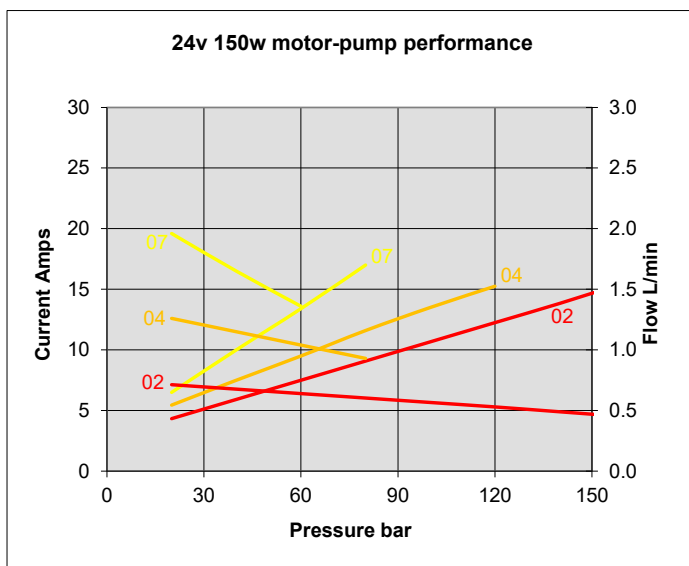
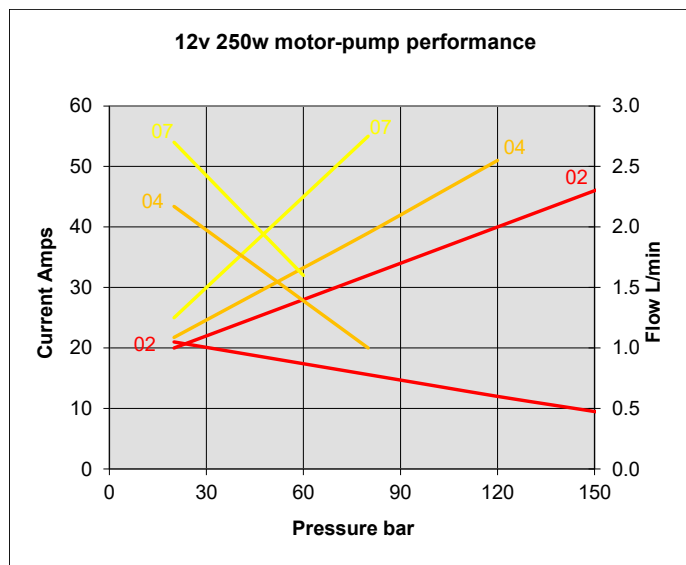


Nominal motor-pump performance at constant voltage and at nominal 20-25° C with ISO 3448/VG22

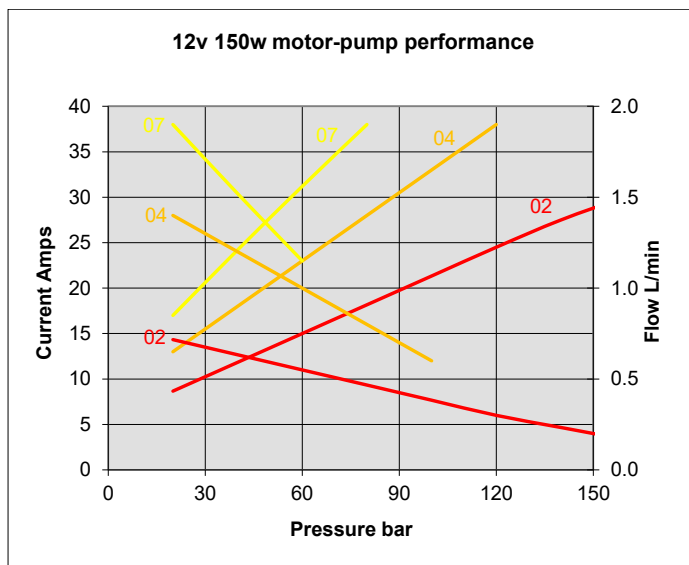

S2—Short time Duty— Maximum run time at load, followed by a time of rest to re-establish ambient temperature.